

4. Raccorderia




Curve (90°R = 1,5D) saldate.

Acciaio AISI 304-304L/316-316L

DN ISO		Diametro esterno x spessore (mm)	Raggio curvatura (mm)
(mm)	(pollici)		
15	1/2"	21,3 x 1,5	27
		21,3 x 2	
20	3/4"	26,9 x 1,5	28,5
		26,9 x 2	
25	1"	33,7 x 1,5	38,1
		33,7 x 2	
		33,7 x 2,5	
32	1 1/4"	42,4 x 1,5	47,5
		42,4 x 2	
		42,4 x 2,5	
40	1 1/2"	48,3 x 1,5	57,2
		48,3 x 2	
		48,3 x 2,5	
50	2"	60,3 x 1,5	76,2
		60,3 x 2	
		60,3 x 2,5	
		60,3 x 3	
65	2 1/2"	76,1 x 2	95,2
		76,1 x 2,5	
		76,1 x 3	
80	3"	88,9 x 2	114,3
		88,9 x 2,5	
		88,9 x 3	
-	3 1/2"	101,6 x 2	133,3
		101,6 x 3	
100	4"	114,3 x 2	152,4
		114,3 x 2,5	
		114,3 x 3	
125	-	139,7 x 2	190,5
		139,7 x 3	
		139,7 x 4	

DN ISO		Diametro esterno x spessore (mm)	Raggio curvatura (mm)
(mm)	(pollici)		
-	5"	141,3 x 2	190,5
		141,3 x 2,5	
		141,3 x 3	
		141,3 x 4	
150	6"	168,3 x 2	228,5
		168,3 x 2,5	
		168,3 x 3	
		168,3 x 4	
200	8"	219,1 x 2,5	305
		219,1 x 3	
		219,1 x 4	
250	10"	273 x 2,5	381
		273 x 3	
		273 x 4	
300	12"	323,9 x 2,5	457,2
		323,9 x 3	
		323,9 x 4	
350	14"	355,6 x 3	534
		355,6 x 4	
		355,6 x 5	
400	16"	406,4 x 3	609
		406,4 x 4	
		406,4 x 5	
450	18"	457,2 x 3	685
		457,2 x 4	
		457,2 x 5	
500	20"	508 x 4	762
		508 x 5	
		508 x 6	

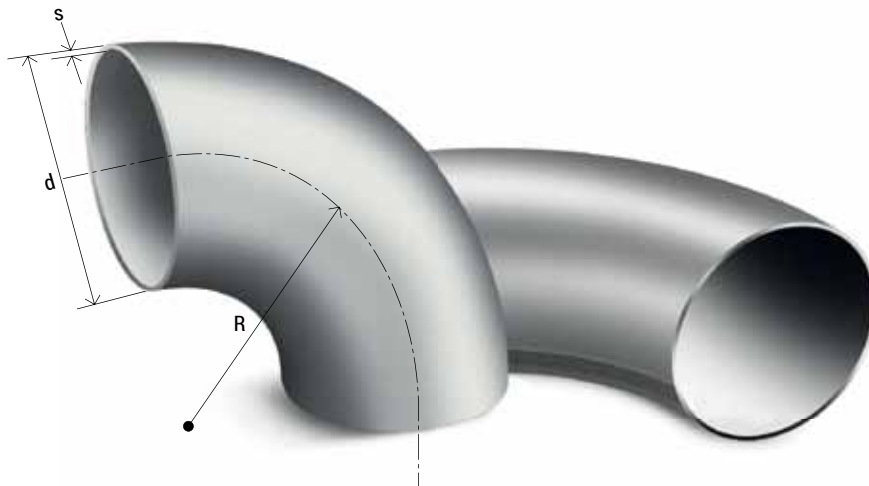

4. Raccorderia



Curve (90°R = 1,5D) senza saldatura, long radius.

Acciaio AISI 304L/316L.

ASME A403 / A815 - ASME 16.9.

DN ISO	Gas Asa	Diametro esterno x spessore (mm)	Schedula	Raggio curvatura (mm)
15	1/2"	21,34 x 2,11	10s	38,1
		21,34 x 2,77	40 s	
		21,34 x 3,73	80 s	
20	3/4"	26,67 x 2,11	10 s	38,1
		26,67 x 2,87	40 s	
		26,67 x 3,91	80 s	
25	1"	33,40 x 2,77	10 s	38,1
		33,40 x 3,38	40 s	
		33,40 x 4,55	80 s	
		33,40 x 6,35	160 s	
32	1 1/4"	42,16 x 2,77	10 s	47,6
		42,16 x 3,56	40 s	
		42,16 x 4,85	80 s	
		42,16 x 6,35	160 s	
		42,40 x 2	-	
40	1 1/2"	48,26 x 2,77	10 s	57,2
		48,26 x 3,68	40 s	
		48,26 x 5,08	80 s	
		48,26 x 7,14	160 s	
		48,30 x 2	-	
50	2"	60,33 x 2,77	10 s	76,2
		60,33 x 3,91	40 s	
		60,33 x 5,54	80 s	
		60,33 x 8,74	160 s	

DN ISO	Gas Asa	Diametro esterno x spessore (mm)	Schedula	Raggio curvatura (mm)
65	2 1/2"	73,03 x 3,05	10 s	95,3
		73,03 x 5,16	40 s	
		73,03 x 7,01	80 s	
		73,03 x 9,52	160 s	
		76,10 x 2	-	
		76,10 x 2,9	-	
80	3"	88,90 x 3,05	10 s	114,3
		88,90 x 5,49	40 s	
		88,90 x 7,62	80 s	
		88,90 x 11,13	160 s	
90	3 1/2"	101,6 x 3,05	10 s	133,3
		101,6 x 5,74	40 s	
		101,6 x 8,08	80 s	
100	4"	114,3 x 3,05	10 s	152,4
		114,3 x 6,02	40 s	
		114,3 x 8,56	80 s	
		114,3 x 13,49	160 s	
125	5"	141,3 x 3,40	10 s	190,5
		141,3 x 6,55	40 s	
		141,3 x 9,52	80 s	
150	6"	168,3 x 3,40	10 s	228,6
		168,3 x 7,11	40 s	
		168,3 x 10,97	80 s	
200	8"	219,1 x 3,76	10 s	305
		219,1 x 8,18	40 s	
		219,1 x 12,7	80 s	
250	10"	273,0 x 4,19	10 s	381
		273,0 x 9,27	40 s	
		273,0 x 12,7	80 s	
300	12"	323,9 x 4,57	10 s	457,2
		323,9 x 9,52	40 s	
		323,9 x 12,7	80 s	

